



版本	修订内容	日期	绘图	批准
V1.0	DWG.REL	2023.3.17	ZJM	JZF



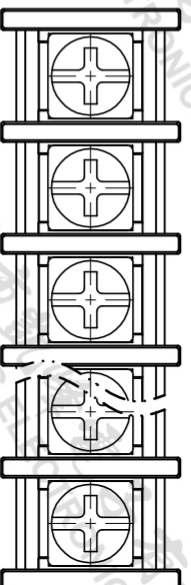


- 材质及电镀
 - ① 螺丝: M4.0, 钢, 镀镍
 - ② 塑件: PA66, UL94V-0
 - ③ 焊针: 铜合金, 0.7t 镀锡

- 电气性能 UL IEC
 - 额定电压: 300V 750V
 - 额定电流: 25A 32A
 - 绝缘电阻: 500MΩ/DC500V
 - 耐电压: AC2000V/Min

- 机械性能
 - 温度范围: -40°C ~ +105°C
 - 适用线径: 22-12AWG 4.0mm²
 - 最大扭矩值: 1.2N.m 12.24kgf.cm

• 符合REACH/RoHS环保要求

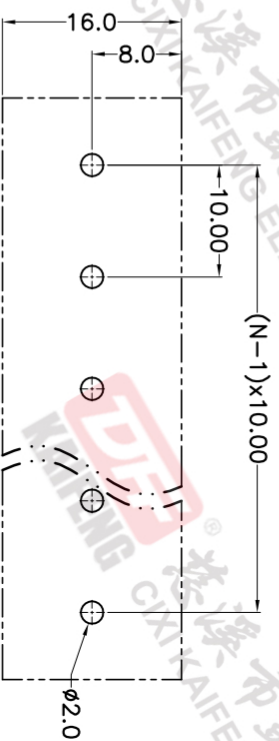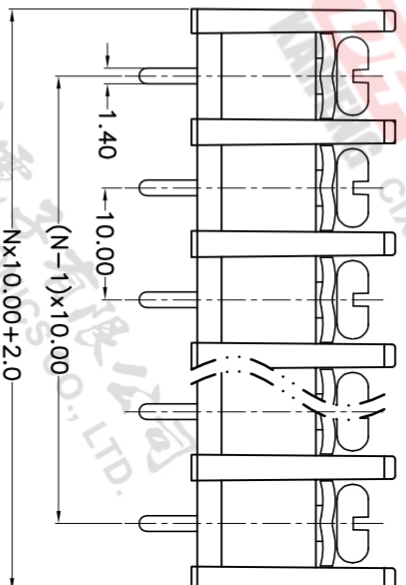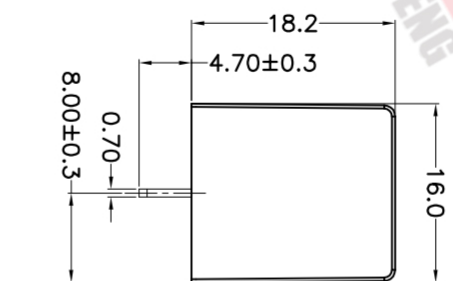


P.C.B. LAYOUT

间距尺寸公差	其它未注尺寸公差	比例
>0 ~ 6	>0 ~ 30	1:1
>6 ~ 10	>30 ~ 60	图页
>10 ~ 24	>60 ~ 100	1/1
>24 ~ 30	>100 ~ 150	
±0.15	±0.30	
±0.20	±0.50	
±0.30	±0.70	
±1.00	±1.30	
±2.0		

订购方式

KF-55C-10.0-XXP-1 X-XXXXX

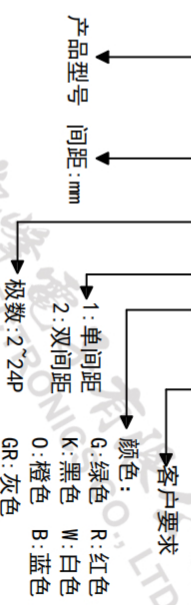

投影法	品名	产品系列
mm	KF-55C-10.0-XXP-1X	KF-55C
纸张尺寸	A4	

DFE 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD

