







REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2024.4.26	ZHANG	JIN



- Material
 - ØHousing 1: PA66, UL94V-0
 - ØHousing 2: PA66, UL94V-0
 - ØCover : PA66, UL94V-0
 - ØReed : Stainless steel
 - ØPin header :Copper alloy,Tin plated
- Electrical
 - UL IEC
 - Rated voltage : 300V 630V
 - Rated current : 40A 41A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 24-8AWG;0.2-6mm²
- Mechanical
 - Operating temperature:-40℃~+105℃
 - Soldering temperature:250℃±5/5sec
 - Strip length: 9-10mm
- Conform to REACH and RoHS

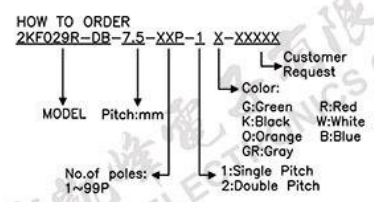

Pitch range	Nominal dimension range	PROJECTION	TITLE
>0	>6	0.1/10	2KF029R-DB-7.5-XXP-1X
~6	~10		UNIT mm
~10	~24		SHEET SIZE A4
~24	~30		SERIES 2KF029R-DB
~30	~60		
~60	~100		
~100	~150		
>150	>150		
±0.15	±0.20	±2°	
±0.30	±0.30		
±0.50	±0.70		
±1.00	±1.30		
±2°			
DRAWING TYPE		CUSTOMER DRAWING	
SCALE		1:1 SHEET 1/1	
DRAWING NO.		W11001302	

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD