

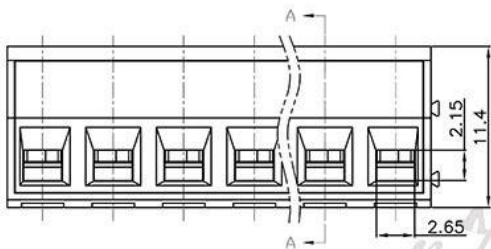


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2023.7.20	ZHANG	JIN

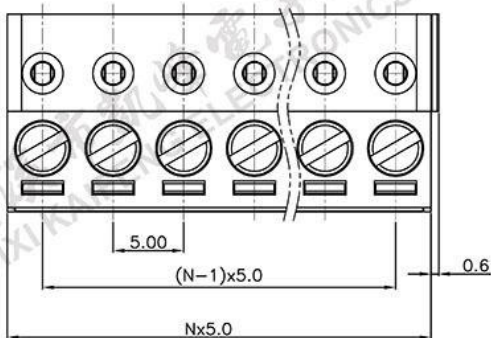

SECTION A-A

- Material
 - ①Housing : PA66, UL94V-0
 - ②Screw : M3.0 steel, Zinc plated, *- slot type
 - ③Contact : Copper alloy, Tin plated
 - ④Clamp : Copper alloy, Ni plated
 - ⑤Cover : PA66, UL94V-0
- Electrical
 - UL IEC
 - Rated voltage : 300V 250V
 - Rated current : 10A 12A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance : 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range : 28-16AWG, 0.2-1.5mm²
- Mechanical
 - Operating temperature: -40°C ~ +115°C
 - Soldering temperature: 250°C ± 5/5sec
 - Torque: 0.4N.m (3.6Lb-in)
 - Strip length: 5-6mm
- Conform to REACH and RoHS

HOW TO ORDER
 KF332-5.0-XXP-1 X-XXXX

MODEL Pitch:mm
 No. of poles: 2~24P

Color:
 G:Green R:Red
 K:Black W:White
 O:Orange B:Blue
 GR:Gray

1:Single Pitch
 2:Double Pitch

Customer Request

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>6	0.1/10	mm	KF332-5.0-XXP-1X-001H
~6	~10		A4	SERIES KF332
~10	~24			
~30	~30			
~60	~60			
~100	~100			
~150	~150			
±0.15	±0.20			
±0.30	±0.30			
±0.50	±0.50			
±0.70	±1.00			
±1.30	±2			
DRAWING TYPE		CUSTOMER DRAWING		
SCALE		1:1 SHEET 1 OF 1		
DRAWING NO.		W15002452		

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD