

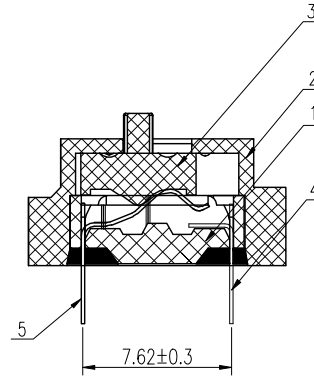




REV	ECN	CONTENT	CHECK	DATE
V0.0		初版发行	LJ	2017.03.12
V1.0		整理图面	ZY	2019.03.04
V2.0		整理图面	WL	2020.05.25

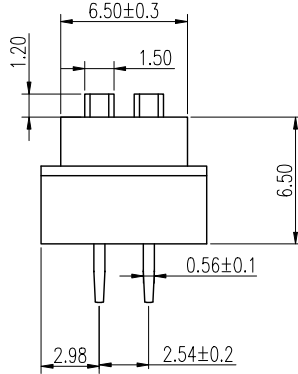


- 技术要求:**
- 额定电流:
25mA, 24VDC (开与关切换时)
100mA, 50VDC (开与关不切换时)
 - 接触阻抗:
≤50mΩ (初始), ≤100mΩ (寿命测试后)
 - 绝缘电阻: ≥100MΩ / 500VDC
 - 耐电压: 500VAC / 1minute
 - 拨动力: 1000g max
 - 拨动行程: 2mm
 - 机械寿命: ≥2000 cycles
 - 电气寿命: ≥2000 cycles / 25mA, 24VDC
 - 使用温度: -40℃ ~ +85℃
 - 存储温度: -40℃ ~ +85℃
 - 符合RoHS要求

焊接说明:
波峰焊: 250℃ ± 10℃, 5S max,
手工焊接: 30W电烙铁, 320 ± 5℃, 3S max
焊接前保持开关在“OFF”状态

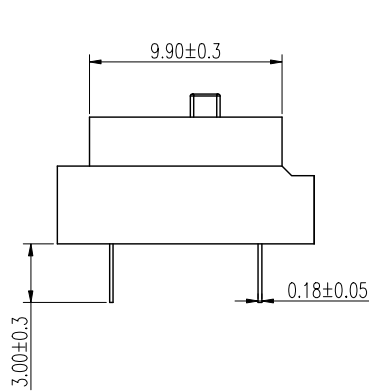


订购方式

KF1005 - 02P - R3 - F S - DFT-01B

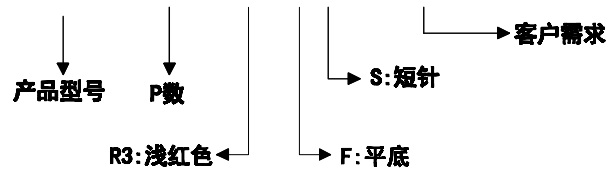

SCHEMATIC(TYP.)



General tolerance in mm						radii and chamfers			shorter angle side			=	— //		
over 0.5	over 3	over 6	over 30	over 120	over 400	over 0.5	over 3	over 6	up to	over 10	over 50		over 0	over 100	over 150
to 3	to 6	to 30	to 120	to 400	to 1000	to 3	to 6	to 6	to 10	to 50	to 120	all	to 100	to 150	to 150
±0.15	±0.2	±0.25	±0.3	±0.5	±0.8	±0.2	±0.5	±1.0	±1°	±30'	±20'	0.5	0.2	0.3	0.5

5	PIN2	/	2	铜合金	镀金
4	PIN1	/	2	铜合金	镀金
3	拨柄	/	2	工程塑料	UL94V-0
2	外壳	/	1	工程塑料	UL94V-0
1	底座	/	1	工程塑料	UL94V-0
序号	零件名称	零件编码	数量	材质	备注

APP.	DATE	NAME	KF1005-02P-R3FS-DFT-01B		
CHK.	DATE	DWGNO.	W20000051		
DWG.	DATE	SHEET	1/1	PROJECTION-METHOD	☉ ☒
UNITS	MM	SCALE	1:1		

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO., LTD