

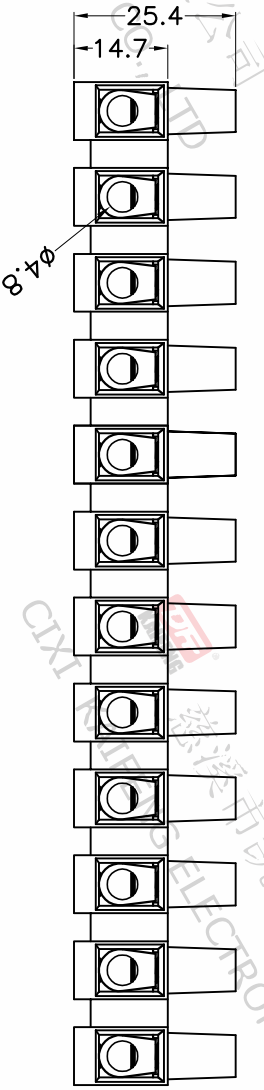


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.29	DENG	JIN

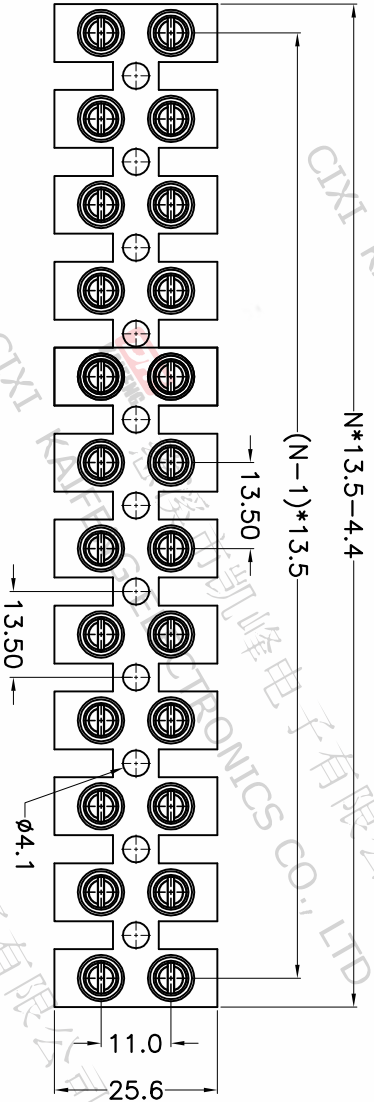


- Material
 ◉Screws : M4.0 steel, Zinc plated
 ◉Clamp : Zinc alloy, Ni plated
 ◉Reed : Stainless steel
 ◉Housing : PA66, UL94V-2

- Electrical
 UL IEC
 Rated voltage : 600V 750V
 Rated current : 50A 57A
 Wire range: 14-8AWG 10.0mm²
 Withstanding Voltage : AC2200V/1min

- Mechanical
 Operating temperature: -40℃ ~ +110℃
 Soldering temperature: 250℃ ±5/5sec
 Torque: 1.2N.m (10.53lb.in)
 Strip length: 6-7mm

• RoHS compliance

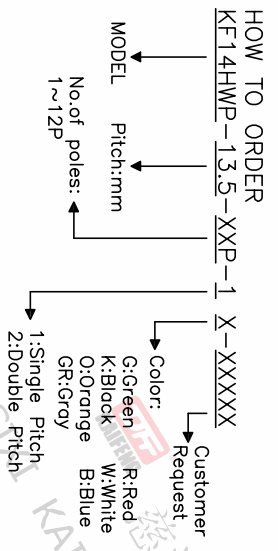

Pitch range	Nominal dimension range	PROJECTION
>0	>0	0.1/10
>6	>30	□
~	~	△
6	60	▽
10	100	▽
24	150	▽
±0.15	±0.30	±2°
±0.20	±0.30	
±0.30	±0.50	
±0.70	±1.00	
±1.30	±1.30	

DRAWING TYPE	CUSTOMER DRAWING	SHEET	1 OF 1
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	W18000142	SHEET SIZE	A4
		SERIES	KF14HWP
		TITLE	KF14HWP-13.5-XXP-1X

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD

