
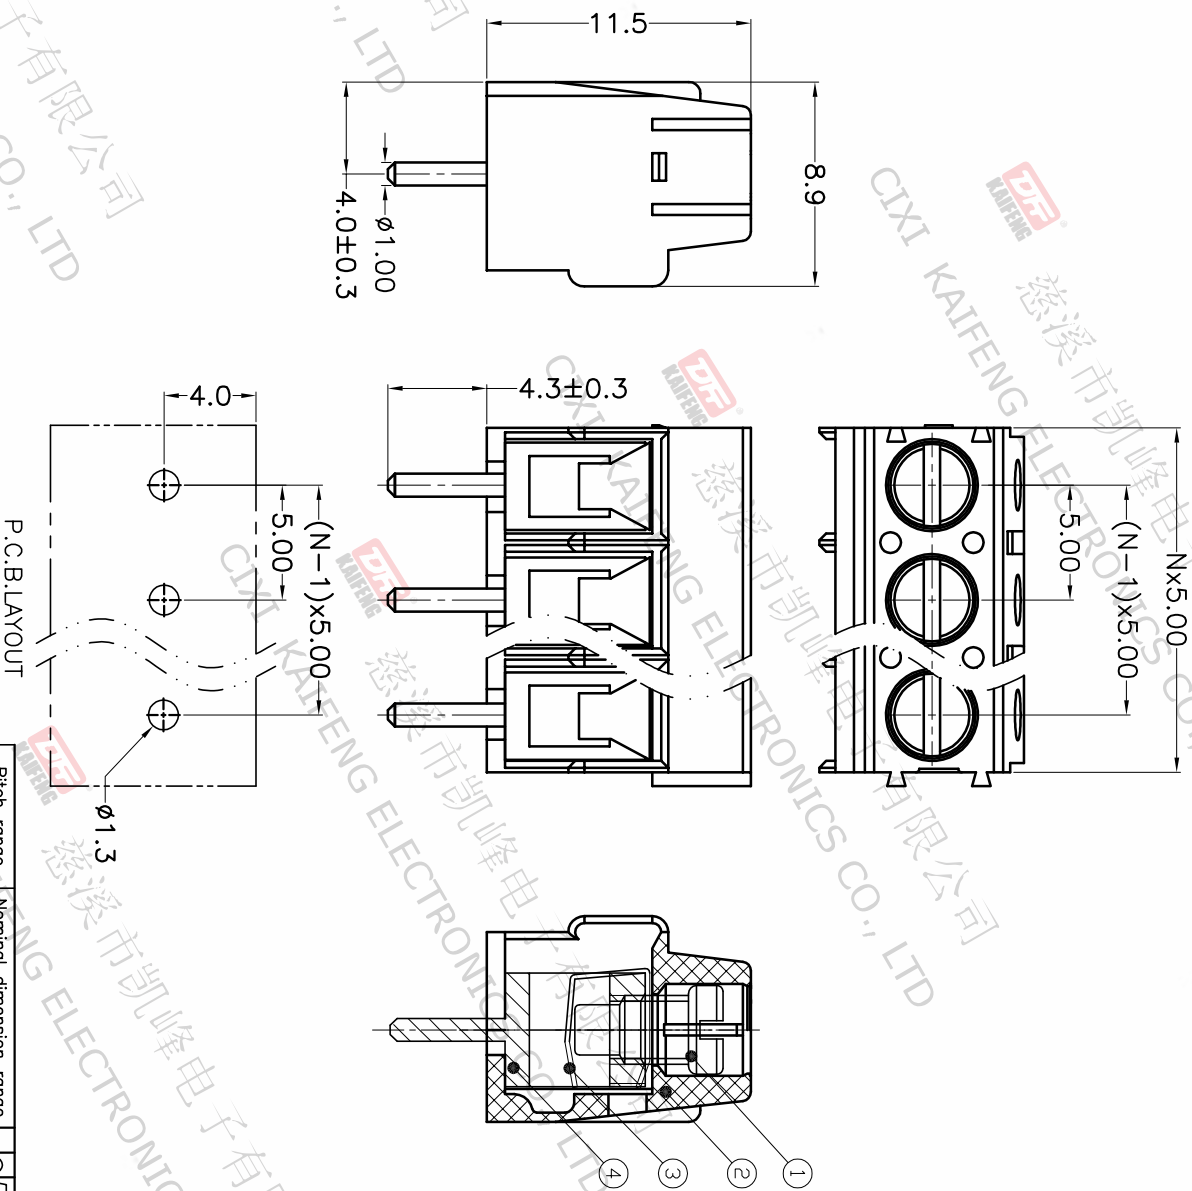


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.17	DENG	JIN

- Material
 ØScrews : M2.5 steel, Zinc plated,
 - slot type
 ØHousing : PA66, UL94V-0
 ØReed : Stainless steel
 ØPin header : Copper alloy, Tin plated
- Electrical
 UL IEC
 Rated voltage : 300V 250V
 Rated current : 15A 24A
 Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC2000V/1min
 Wire range: 24-14AWG 2.5mm²
- Mechanical
 Operating temperature: -40°C~+105°C
 Soldering temperature: 250°C±5/5sec
 Torque: 0.4N.m (3.54Lb.in)
 Strip length: 5-6mm
- RoHS compliance

HOW TO ORDER

KF170 V -5.0-XXP-1 X-XXXXXX

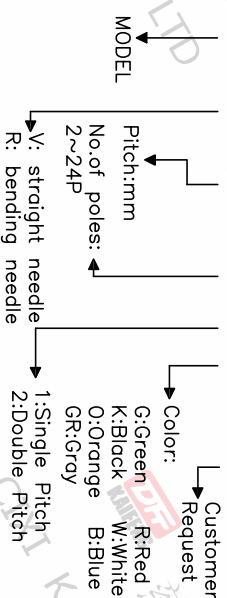

Pitch range	Nominal dimension range	Projection	UNIT
>0	>0	0.1/10	mm
>6	>30		
~	~		
~	~		
6	60		
10	100		
24	150		
±0.15	±0.30	±2'	
±0.20	±0.30		
±0.30	±0.50		
±0.70	±1.00		
±1.30	±1.30		

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W15000102

PROJECTION
 UNIT
 SHEET SIZE
 A4

TITLE
 KF170V-5.0-XXP-1X

SERIES
 KF170

DF
 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD